


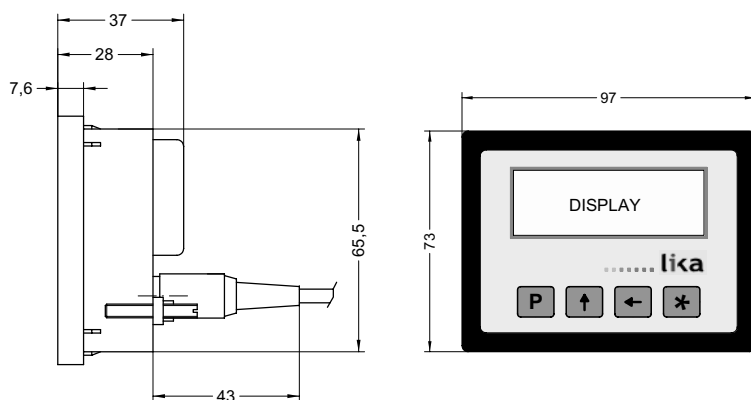

LD140 + SM25

PARAMETERS

3 Offset values, preset, resolution, decimal point, mm/inch, counting direction

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range: $0^{\circ}\text{C} \div +50^{\circ}\text{C}$ ($+32^{\circ}\text{F}$, $+122^{\circ}\text{F}$)
 Storage temperature range: $-20^{\circ}\text{C} \div +80^{\circ}\text{C}$ (-4°F , $+176^{\circ}\text{F}$)
 Protection: IP60 front, IP40 back

MECHANICAL SPECIFICATIONS

Dimensions: $96 \times 72 \times 43,5 \text{ mm}$
 Cut out: $89 \times 65 \text{ mm}^2$
 Display: LCD, 14 mm ($-999999 \div 999999$)

ELECTRICAL SPECIFICATIONS

Power supply: 1,5 V battery
 Consumption: 700 μA
 Measurement speed: $<10 \text{ m/s max.}$
 Input circuit: SM25 magnetic sensor
 Interface: RS232 (optional)

ACCESSORIES

SM25: Magnetic sensor
 MT25: Magnetic tape

ORDERING CODE

XXXXX	-	XX	-	XX
SERIES				
LD140				
INPUT				INTERFACE
Magnetic sensor		M7		I1 RS232



- data sheet
 - manual